

Agile Software Development

Produced
by

Eamonn de Leastar (edelestar@wit.ie)

Department of Computing, Maths & Physics
Waterford Institute of Technology

<http://www.wit.ie>

<http://elearning.wit.ie>




Waterford Institute of Technology
INSTITIÚID TEICNEOLAÍOCHTA PHORT LÁIRCE



Writing JUnit Tests

Structuring Tests

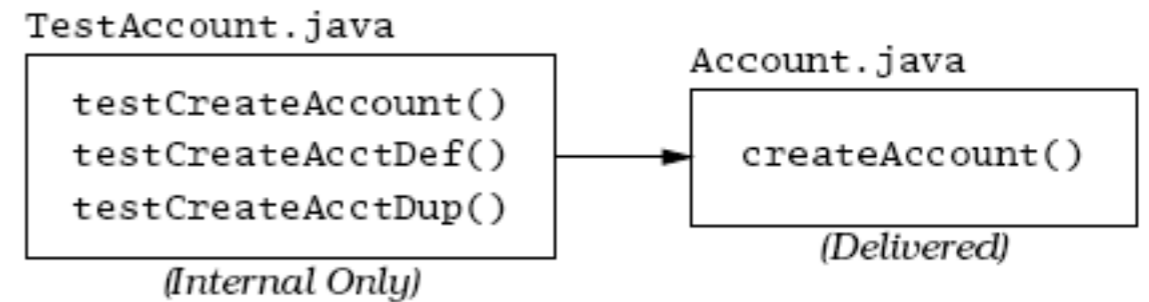

- Adopt Naming conventions
 - A method named `create-Account` to be tested, then test method might be named `testCreateAccount`.
 - The method `test-CreateAccount` will call `createAccount` with the necessary parameters and verify that `createAccount` works as advertised.
 - Many test methods that exercise `createAccount`.
- Distinguish between Testing vs Production Code
 - The test code is for our internal use only - Customers or endusers will never see it or use it.

Test Code Responsibilities

- 4 steps:
 1. Setup all conditions needed for testing (create any required objects, allocate any needed resources, etc.)
 2. Call the method to be tested
 3. Verify that the method to be tested functioned as expected
 4. Clean up after itself
- Never actually run the production code directly; at least, not the way a user would.
- Instead, run the test code, which in turn exercises the production code under very carefully controlled conditions.

JUnit Asserts

- Methods that assist in determining whether a method under test is performing correctly or not.
 - Generically called asserts.
 - The developer asserts that some condition is true; that two bits of data are equal, or not, etc...
- Will record failures (when the assertion is false) or errors (when an unexpected exception occurs), and report these through the JUnit classes.
 - The GUI version will show a red bar and supporting details to indicate a failure
- Asserts are the fundamental building block for unit tests; the JUnit library provides a number of different forms of assert.

assertEquals

- assertEquals([String message], expected, actual)
 - expected is a value predicted to be correct (typically hard-coded),
 - actual is a value actually produced by the code under test.
 - message is an optional and will be reported in the event of a failure.
- Any kind of object may be tested for equality; the appropriate equals method will be used for the comparison (String.equal for instance).
- Be aware that the equals method for native arrays, however, does not compare the contents of the arrays, just the array reference itself

assertEquals (with Tolerance)

- Computers cannot represent all floating-point numbers exactly, and will usually be off a little bit.
- Thus using assert to compare floating point numbers (floats or doubles in Java), specify one additional piece of information, the tolerance.
- assertEquals([String message], expected, actual, tolerance)
 - eg
 - assertEquals("Should be 3 1/3", 3.33, 10.0/3.0, 0.01);

assertNull / assertNotNull

- `assertNull([String message], java.lang.Object object)`
- `assertNotNull([String message], java.lang.Object object)`
- Asserts that the given object is null (or not null), failing otherwise.

assertTrue / assertFalse

- `assertTrue([String message], boolean condition)`
- Asserts that the given boolean condition is true, otherwise the test fails.
- If test code is littered with the following:
 - `assertTrue(true);`
- it suggests that the construct is used to verify some sort of branching or exception logic, it's probably a bad idea and may indicate unnecessarily complex test logic.
- `assertFalse([String message], boolean condition)`
- Asserts that the given boolean condition is false, otherwise the test fails.

assertSame / assertNotSame

- `assertSame([String message], expected, actual)`
- Asserts that `expected` and `actual` refer to the same object, and fails the test if they do not.
- `assertNotSame([String message], expected, actual)`
- Asserts that `expected` and `actual` do not refer to the same object, and fails the test if they are the same object..

fail

- `fail([String message])`
- Fails the test immediately, with the optional message. Often used to mark sections of code that should not be reached (for instance, after an exception is expected).

Using asserts

- Usually have multiple asserts in a given test method, as you prove various aspects and relationships of the method(s) under test.
- When an assert fails, that test method will be aborted and the remaining assertions in that method will not be executed this time
- Normally expect that all tests pass all of the time.
- In practice, that means that when a bug introduced, only one or two tests fail.
- Developer should NOT continue to add features when there are failing tests

JUnit Framework

- The import statement brings in the necessary JUnit methods/ annotations.
- Individual tests are marked with the @Test annotation against public methods.

```
import static org.junit.Assert.assertEquals;
import org.junit.Test;

public class TestClassOne
{

    @Test
    public void testAddition ()
    {
        assertEquals(4, 2 + 2);
    }

    @Test
    public void testSubtraction ()
    {
        assertEquals(0, 2 - 2);
    }
}
```

@Before / @After

- Each test should run independently of every other test; this allows any individual test to be run at any time, in any order.
- This requires ability to reset some parts of the testing environment in between tests, and/or clean up after a test has run.
- @Before / @After annotations ensure that these methods are called before and after each test is executed.

```
public class TestLargest
{
    private int[] arr;

    @Before
    public void setUp()
    {
        arr = new int[] {8,9,7};
    }

    @After
    public void tearDown()
    {
        arr = null;
    }
}
```

@Before / @After Example

```
public class TestDB extends TestCase
{
    private Connection dbConn;

    @Before
    public void setUp()
    {
        dbConn = new Connection("oracle", 1521, "fred", "foobar");
        dbConn.connect();
    }

    @After
    public void tearDown()
    {
        dbConn.disconnect();
        dbConn = null;
    }

    @Test
    public void testAccountAccess() // Uses dbConn
    {
    }

    @Test
    public void testEmployeeAccess() // Uses dbConn
    {
    }
}
```

@BeforeClass / @AfterClass

- One Time set up for full TestCase
- Called once before all tests are executed
- Called once after all tests have executed
- Does not effect @Before / @After

```
public class TestDB extends TestCase
{
    private Connection dbConn;

    @Before
    public void setUp()
    {
        dbConn = new Connection("oracle", 1521, "fred", "foobar");
        dbConn.connect();
    }

    @After
    public void tearDown()
    {
        dbConn.disconnect();
        dbConn = null;
    }

    @BeforeClass
    public static void populateDB()
    {
    }

    @AfterClass
    public static void depopulateDB()
    {
    }
}
```


JUnit Test Composition

- JUnit runs all of the @test annotated methods automatically.
- Individual tests can be removed temporarily via the @Ignore annotation
- testLongRunner uses a brute-force algorithm to find the shortest route for a traveling salesman. Removed from default tests

```
public class TestClassTwo
{
    // This one takes a few hours...
    @Ignore
    @Test
    public void testLongRunner ()
    {
        TSP tsp = new TSP(); // Load with default cities
        assertEquals(2300, tsp.shortestPath(50)); // top 50
    }

    @Test
    public void testShortTest ()
    {
        TSP tsp = new TSP(); // Load with default cities
        assertEquals(140, tsp.shortestPath(5)); // top 5
    }

    @Test
    public void testAnotherShortTest ()
    {
        TSP tsp = new TSP(); // Load with default cities
        assertEquals(586, tsp.shortestPath(10)); // top 10
    }
}
```


Composed Tests

- Higher-level test that is composed of both of two other test classes
- Thee following individual test methods will be run:
 - testAddition() from TestClassOne
 - testSubtraction() from TestClassOne
 - testShortTest() from TestClassTwo
 - testAnotherShortTest() from TestClassTwo

```
import org.junit.AfterClass;
import org.junit.BeforeClass;
import org.junit.runner.RunWith;
import org.junit.runners.Suite;

@RunWith(Suite.class)
@Suite.SuiteClasses({TestClassOne.class,
                    TestClassTwo.class})

public class MetaTest
{
}
}
```

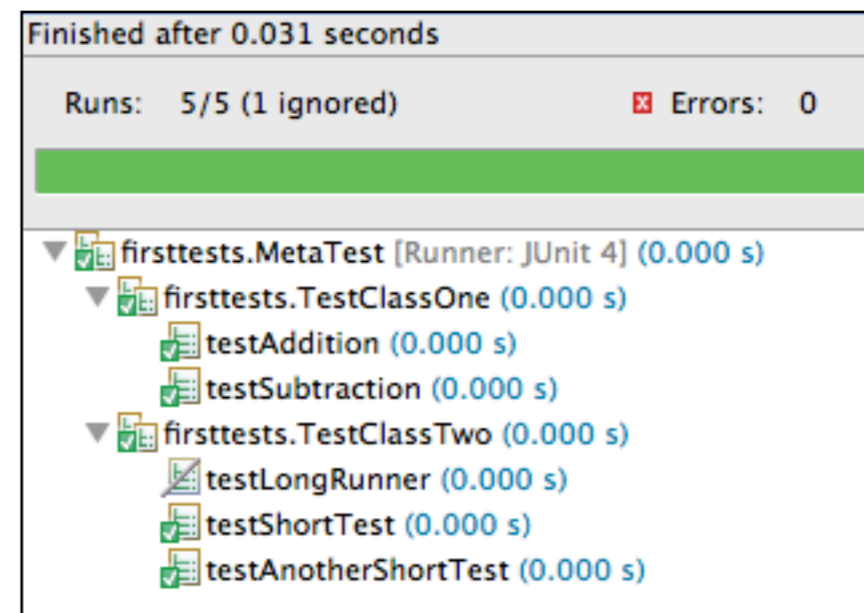

Composed Tests with @BeforeClass / @AfterClass

- One time initialization in MetaTest.
- Then all (non Ignored) tests in TestClassOne and TestClassTwo
- All @Before / @After methods in these classes executed
- All @BeforeClass / @AfterClass methods also executed.

```
@RunWith(Suite.class)
@Suite.SuiteClasses({TestClassOne.class,
TestClassTwo.class})

public class MetaTest
{

    @BeforeClass
    public static void initialize()
    {
        //...
    }

    @AfterClass
    public static void terminate()
    {
        //...
    }
}
```

JUnit Custom Asserts

- The standard asserts that JUnit provides are usually sufficient for most testing.
- Custom asserts can be introduced by subclassing `TestCase` and using the subclass for all testing.

```
public class ProjectTest
{
    public void assertEvenDollars (String message, Money amount)
    {
        assertEquals(message, amount.asDouble() -
            (int) amount.asDouble(), 0.0,
            0.001);
    }

    public void assertEvenDollars (Money amount)
    {
        assertEvenDollars("", amount);
    }
}
```

JUnit & Exceptions


- There are two kinds of exceptions worth noting:
 - Case 1. Expected exceptions resulting from a test
 - Case 2. Unexpected exceptions from something that's gone horribly wrong
- For case 2 - JUnit will catch these and provide a complete stack trace.

Expected Exceptions

- For case 1- sometimes in a test, need to verify that the method under test has actually thrown an exception
- “expected” annotation parameter declares that the specified exception should have been thrown.

```
@Test
public void testEmpty ()
{
    try
    {
        Largest.largest(new int[] {});
        fail("Should have thrown an exception");
    }
    catch (RuntimeException e)
    {
        assertTrue(true);
    }
}
```

```
@Test (expected = RuntimeException.class)
public void testEmpty ()
{
    Largest.largest(new int[] {});
}
```

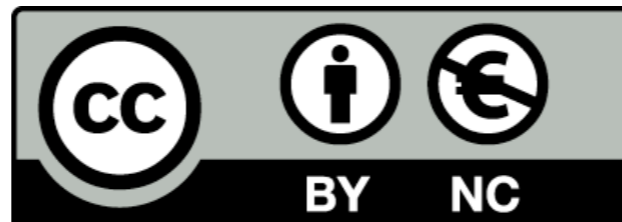

Except where otherwise noted, this content is licensed under a Creative Commons Attribution-NonCommercial 3.0 License.

For more information, please see <http://creativecommons.org/licenses/by-nc/3.0/>

